


SAFER ACCESS TO CONSERVATORY ROOFS IS HERE

DESIGNED AND MANUFACTURED IN THE UK FOR MAXIMUM SAFETY, COMFORT & DURABILITY...


- + Extra wide extending ladder with pivoting feet to provide stability over a range of heights
- + Made from LFI's industry-leading products, each component in accordance with their relevant standards
- + Wide PVC bearer bars to minimise the risk of marking or damaging the contact surfaces whilst spreading the weight
- + Max load of ladder is 150kg*
- + Folds away for easy transport and storage
- + Access eave heights between 2.1 and 2.9m
- + Complete with suction cup for tying off
- + Handrail on roof section to aid climbing between sections
- + 1.0m extension available complete with bearer bar.



*The user must ensure the roof loading capability

**WHY LFI?
MY WORK.
MY SAFETY.
MY LADDER.**

CONSERVATORY LADDER

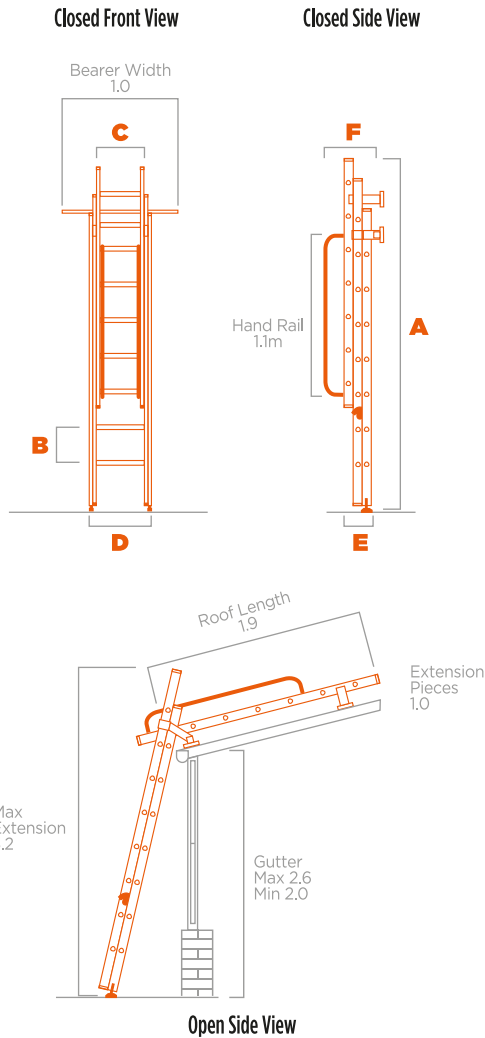

CONSERVATORY LADDER & ACCESSORIES

Product SKU	Rung Count	A Closed Length	Weight (kg)
STCL01	3x 7	2.4	20.0
STCL02 (Extension piece)	4	1.1	2.2

OTHER DIMENSIONS

	B	C	D	E	F
Rung Pitch	0.25	0.41	0.56	0.18	0.42
Top Width					
Bottom Width					
Depth					

IMPORTANT SAFETY NOTICE

As with any Work At Height activity, a suitable risk assessment should be conducted before use. The Risk Assessment should pay special attention to how you get the ladder on the roof safely & the general condition of the roof to sustain your weight. It is highly recommended that a form of fall arrest system is used. Please contact us on 01531 820541 for more information on the safe use of this equipment.

All dimensions in metre. All measurements are nominal.

Have an enquiry?

Call us on 01531 820541 or email info@lfi-ladders.co.uk

britishladders.co.uk

