



FALL PROTECTION

USER INSTRUCTIONS

EN 360


SELF-RETRACTING LIFELINE



Model: 79210
Compatible with kit(s): 79204

**Images for illustrative purposes only.
Actual product may differ.*

LABELLING ON LANYARDS

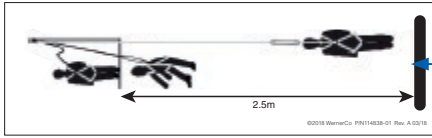

Read the instructions for explanation of this pattern.

Indication of conformity with the directive

Manufacturer's name

The product reference

Read the instructions before use

Number of the certifying organisation responsible for inspecting the equipment

CE0120

WERNER

FALL PROTECTION
 SELF-RETRACTING LIFELINE
 INCORPORATING SHOCK ABSORBER
 FALL ARREST SYSTEM

Werner UK Sales & Distribution Ltd, The Causeway, Maldon, Essex CM9 4LJ

Ref: 79210
 Mfg. Date: xx/xxxx
 Batch No: xxxx
 Serial No: xxxx
 Standard: EN360:2002
To be used only in vertical fall arrest systems
 ©2018 WernerCo. PIN114663-01 Rev. A 03/18

Product name

The number of the standard to which the product conforms and its year

The date (year) of manufacture
 The batch number
 The individual N° within the batch

This notice must be translated (possibly by the retailer) into the language of the country of use. For your safety, comply strictly with the instructions for use, verification, maintenance and storage. Werner UK Sales & Distribution Ltd. cannot be held liable for any direct or indirect accident occurring as a result of use other than provided for in this notice; do not use this equipment beyond its capabilities!


USE AND PRECAUTIONS

A retractable fall arrest device is a piece of personal protection equipment; it should be allocated to a single user (it can only be used by one person at a time). When the user moves (up or down), the webbing winds onto and unwinds from a pulley. The webbing is kept taut by means of a return spring. In the event of a fall, a system locks the webbing and prevents it unwinding, thus stopping the fall instantly. The energy absorber, which is on the main strap, tears to absorb the energy of the fall.

The minimum free space should be: 2.5 m under the user's feet*.

LENGTH OF THE ENERGY ABSORBING LANYARD:	2.50 m
Free fall	0.50 m
Absorption	0.50 m
Safety distance	1.50 m
Clearance of the PPE	2.50 m

** It is essential for safety reason to verify the clearance at the work place before each use and during use in order to be sure there will be no collision with the ground or obstacle in case of fall. Take particular attention to obstacle in movement (for example truck, mobile work platform etc.).*



User safety relies on the effectiveness of the equipment and full understanding of the safety instructions contained in this leaflet.

Product markings should be checked periodically for legibility.

The swivel is linked to an anchor point by a connector (EN362) and the other end (webbing) is attached onto a safety point on a harness.

Sharp edges, small diameter structures and corrosion should be avoided as they may affect the performance of the webbing; or they should be adequately protected.

The device's anchoring point must be positioned above the user (and must comply with standard EN795 (R>12kN - EN795:2012 or R>10kN - EN795:1996).

The anchorage point for the device should be situated above the user (minimum strength 10 kN).

The retractable fall arrest device is certified for use above the attachment the anchorage point (Factor 2 for 1.8m max).

WARNING! In this case the necessary clearance is: 4.5 m under the user's feet.

For use in a temperature range between: - 30°C / 50°C.

Ensure that the general arrangement limits swinging in the event of a fall, and that the work is done in such a way as to limit the risk and the height of a fall.

For safety reasons and before each use, make sure that in the event of a fall there is no obstacle obstructing the normal deployment of the strap. We also recommend that you do not suddenly let go of the webbing when it is rolled out; it is better to keep a hand on it as it reels into the retractable fall arrest.

Before and during use, we recommend that you take all the necessary precautions for a safe rescue should it be needed.

This equipment is for the sole use of people trained, skilled and in good health, or under the supervision of a trained and skilled person. Warning! Certain medical conditions may affect user safety; if in doubt, consult your doctor.

Before using, always check that the locking system is in working order and that the fall indicator is not triggered (if there is one on the connector). Check that the absorber has not been activated. If you are in any doubt as to the condition of the equipment (traces of oxidation) or after a fall (deformation), do not use it and/or return it to the manufacturer or a competent person authorised by the manufacturer.

Do not remove, add or replace any component of the product.

Chemical products: put the system out of use if it comes into contact with chemical products, solvents or fuels which could affect its workings.

TECHNICAL DATA Webbing: 50 mm – Material: polyester – breaking point > 15 KN:

SUITABILITY FOR USE:

The equipment should be used with a fall arrest system as specified in the data sheet (see standard EN363) to guarantee that the dynamic force exerted on the user during the arrest of a fall is maxi 6 kN. A fall arrest harness (EN361) is the only body gripping device that may be used. It may be dangerous to create one's own fall arrest system where each safety function can interfere with another safety function. Therefore, it is important to read the recommendations on using each component in the system before use.

VERIFICATION:

The recommended service life of the equipment is 10 years (in accordance with the annual examination by a competent person authorized by Werner UK Sale & Distribution Ltd., but it may be increased or reduced according to use and/or the results of the annual inspections. The equipment should be inspected if there is any doubt, or following a fall and at least annually, by the manufacturer or a competent person authorised by the manufacturer to check its strength and hence the user's safety. The product's factsheet must be completed (in writing) after each check, the inspection date and the date of the next inspection must be indicated on the factsheet, it is also advisable to specify the date of the next inspection on the product.

SERVICING AND STORAGE: (Comply strictly with these instructions)

During transport, keep the product in its packaging, well away from any cutting surface; clean it with water, wipe it with a rag and hang it up in a well-ventilated location, to let it dry naturally and away from a naked flame or heat source; follow the same procedure for components that have become damp during use. The system must be stored in its packaging in a dry, well aired place protected from extremes of temperature.

EN 365

User's name
Reference
Serial n°
Date of manufacture
Date of purchase
Date of 1st use
Date of inspection, next date of inspection, name, and signature

-	-	-	-	-
---	---	---	---	---

Comments

--

EN 363

Examples of fall arrest system

EN795			
+			
EN362			
+			
EN361	EN361	EN361	EN361
+	+	+	+
EN353/1	EN353/2	EN355	EN360

Example of work restraint and work positioning system

EN795
+
EN362
+
EN358
+
EN354/EN358

As part of your risk assessment, you must have a rescue plan before working at height to deal with any emergency that may arise.
EN341 // EN567 // EN1496 // EN1498 // EN1865 // EN12272 // EN12841

Notified body having performed the EC type inspection.

**SATRA Technology centre,
N°0321 Wyndham Way, Telford Way,
Kettering, Northamptonshire, NN16 8SD,
United Kingdom.**

Notified body inspecting production.

**SGS United Kingdom Ltd., N° 0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom**

Any use other than these described in this leaflet are to be excluded.



FALL PROTECTION

Werner UK Sales & Distribution Ltd.
The Causeway
Maldon
CM9 4LJ

☎ 01621 745 900
✉ uk.customercare@wernerco.com
🌐 wernerfallprotection.co.uk